

iKONIC CLASSIC


PLATFORM LIFT

ikcla500

CORE FEATURES INCLUDE:

- ▶ Eco friendly "A" rated power consumption
- ▶ Screw & Nut Drive System
- ▶ Smooth and quiet ride quality
- ▶ Full Equality Act (**EN81-70**) compliance Available
- ▶ Space Saving
- ▶ No shaft, pit or lifting beam required

SUITABLE FOR:

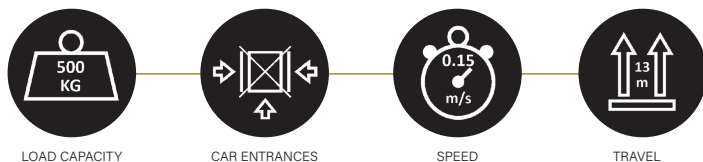

TECHNICAL FEATURES	
LIFT TYPE	Platform
LIFT MODEL	ikcla500
STANDARDS	EN81-41 EN81-70 Machinery Directive 2006/42/EC
MAX DUTY LOAD (Kg)	500
RATED SPEED (m/s)	<0.15
STARTS PER HOUR	20
MAX LIFT TRAVEL (M)	13 (6 Stops)
PIT (mm)	50 or Ramp
HEADROOM (mm)	2250
POWER SUPPLY (TNP)	Single-phase 50/60 Hz 16 A
DRIVE SYSTEM	Screw & Nut
ENTRANCE OPTIONS	Single, Through, Adjacent Entrance
USAGE SUITABILITY	Medium
CONTROL SYSTEM	Micro computer based system
DOOR	Hinged
LANDING DOOR (mm)	900 x 2000
CAR DOOR (mm)	900 x 1100
FIRE RATING	Option for EI60G doors



iKONIC CLASSIC

PLATFORM LIFT

ikclas500

FINISHES SUPPLIED AS STANDARD FOR ikclas500	
WALL	Solid 1 piece guide wall 904mm steel panels. RAL 9016*
FLOOR	Non-slip vinyl or studded rubber selected from our standard range*
HANDRAIL	Aluminium*
CEILING	The ceiling and platform are illuminated by durable and energy- saving LED lights.*
CAR STATION	Aluminium*
LANDING DOORS	Aluminium or Steel*
CONTROLLER CABINET	At the landing entrance*
LANDING FACE PLATE	Aluminium or Steel*

INDICATORS SUPPLIED AS STANDARD FOR ikclas500	
CAR PUSH BUTTONS	Full set of Hold To Run in car station
EMERGENCY COMMUNICATION	Automatic dialling emergency telephone activated upon pressing alarm push*
LANDING PUSHES	Micro movement illuminating pushes, tactile legends compliant with EN81-70*
LANDING INDICATORS	Direction arrows located side of door*
FEATURES	<ul style="list-style-type: none"> • Full set of car pushes • Position indicator • Door open button • Alarm • Voice Synthesiser • Overload Indicator

**We have an extensive range of finishes and indicators any changes requested will be stated in your quotation for actual finishes.*

ADDITIONAL ITEMS INCLUDED NOT INCLUDED FOR ikclas500	
INCLUDED	
DOCUMENTATION	General Arrangement Drawings Technical Manual Health & Safety Documentation Method & Risk Assessments
LIFT DELIVERY	Our offer will include delivery to site a fork lift truck with a driver will need to be provided by the contractor. The off loading area suitable for storage needs to be on the same level and adjacent to where the lift is to be installed.
INSTALLATION	Included
COMMISSIONING	Included

12 MONTH SERVICING FOR ikclas500
Service contracts available on request. Contact our service department for a free quotation service@ikoniclifts.co.uk

12 MONTH WARRANTY FOR ikclas500
INCLUDED- Subject to the lift being maintained by ISO 9001 approved lift service company in accordance with our recommendations

