THE MULTIPURPOSE LIFT

IKONIC **HEAVY DUTY 1000KG** PLATFORM LIFT







SMART MODULARITY

Thanks to our space-saving, modular concept, our lift solutions have an exceptionally short manufacturing and installation time, compared to conventional lifts.

Even high-capacity lifts, like the iKONIC Heavy Duty, are delivered and installed much faster, and at a fraction of the cost.

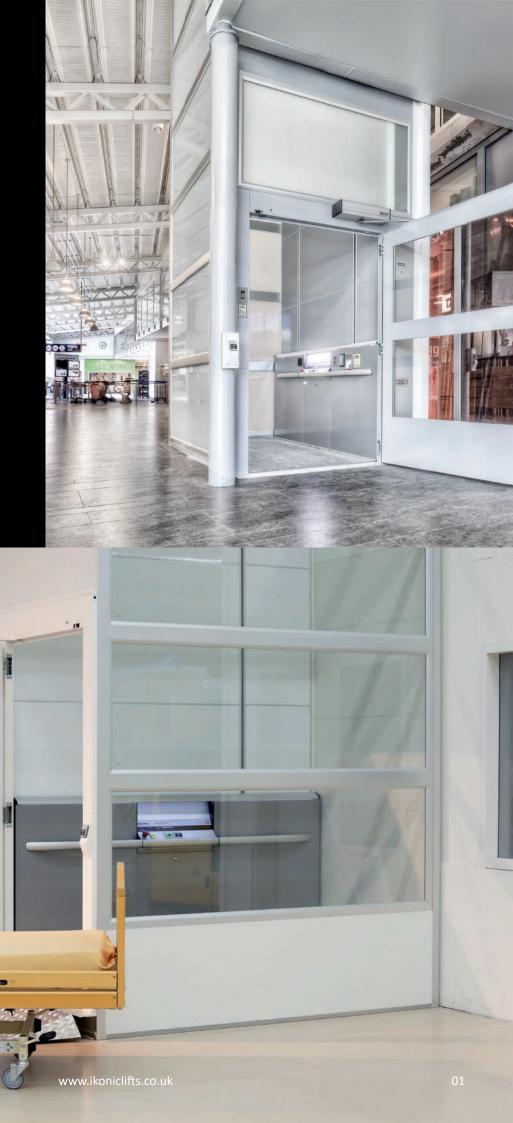

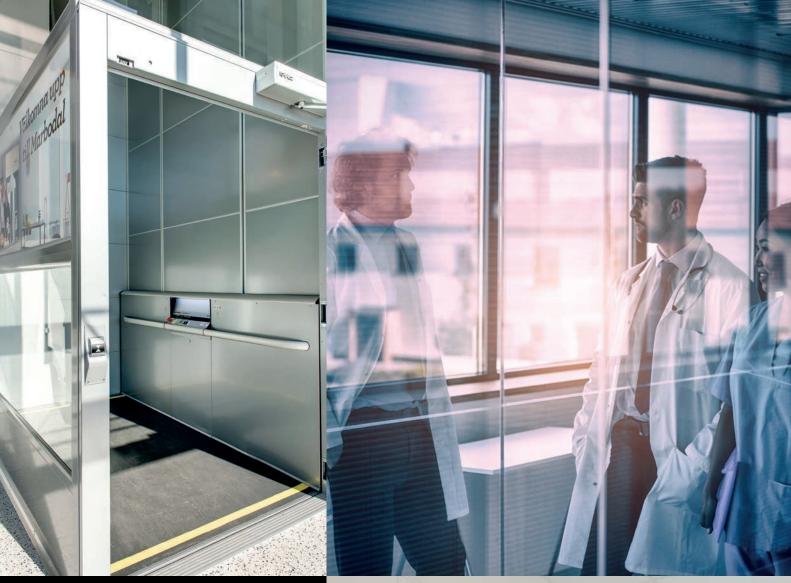

POWERFUL & VERSATILE

The iKONIC Heavy Duty has a rated load of 1000 kg and is certified for the transportation of both goods and people.

That fact makes this platform lift the perfect solution for a wide range of establishments, such as warehouses, offices, restaurants and department stores, but also schools, museums, religious buildings and care homes.





ROBUST & RELIABLE ELEGANCE

Thanks to the wide choice of different floor, glazing and colour options, the design of the iKONIC Heavy Duty can be adapted to blend in seamlessly with most architectural and decorative styles.



TECHNICAL INFORMATION

To make the lift even more robust, the iKONIC Heavy Duty can be upgraded with raised edges on the platform, kick plates in stainless steel for the doors and hardwearing aluminium chequer plate flooring.

To facilitate access, it is also possible to equip with automatic door openers and large, remote call buttons, also known as elbow buttons.



Robust and elegant control panel




Aluminium chequer plate




Kick plate in stainless steel

TECHNICAL INFORMATION IKONIC HEAVY DUTY Location Indoor Rated load 1000 kg Rated speed (m/sec) Max 0.15 Travel Max 13 m Min. headroom at top landing 2350 mm Pit depth 130 mm Platform sizes mm (W×D) 1405×1980 1405×2480 1105×2180 Prefabricated shaft size mm (W×D)* 1825×2056 1825×2556 1525×2256 Cut out sizes mm (W×D)* 1895×2135 1895×2635 1595×2335 Max number of stops 6 Standard finish **RAL 9016** Doors Single hinged Drive system Screw and nut, with safety nut Control system Micro computer based system Standard power supply 400 VAC 3-phase 50/60 Hz 16A Motor power 4.0 KW Lift control Autorun from landings, hold-to-run on platform Machine room Integrated Standards MD 2006/42/EC

DOOR OPTIONS













ACCESS CONFIGURATIONS



1. Single entry 2. Adjacent



3. Open-through

^{*} The exact measurements vary depending on the lift configuration and the conditions on site. Please consult iKONIC Lifts sales representive for more information.

IKONIC HEAVY DUTY PLATFORM LIFT

While conventional lifts take weeks to install and require major construction work, the iKONIC Heavy Duty can be installed in less than a week and require only minimal refurbishment. Our secret is our modular concept, which minimises the impact on your building and shortens the installation time.

Modular lift shaft

No need for a masonry shaft, a ready-made lift shaft of glass or steel panels is always included.

Reduced lift pit

A shallow lift pit of 130 mm is enough.

LOCKING SYSTEMS

Various locking systems.



CALL BUTTONS



Call button. White, grey or black face plate.



Call button. RFID tag reader for auto lock.



Call button. Key lock for auto lock/ central lock.



Wireless, remote elbow button



STANDARDS AND CERTIFICATES

Energy Certificate: B with standard drive according to VDI 4707.

iKONIC Heavy Duty is a CE type certified product and complies with the Machinery Directive 2006/42/EC and applicable parts of EN 81-41.

The control system attains Safety Integrity Level 3 (SIL3).

Top height

The 2300 mm top height fits easily under most ceilings.

Energy-saving LED technology

The ceiling and platform are illuminated by durable and energy-saving LED lights.

Screw-driven system

Reliable 100% electric screw-driven system, no hydraulics.

Machine room less

The machinery fits inside the shaft, no need for a separate machine room.

Customisable platform design

The platform deisgn can be customised with different colours and floor options.




Interior COLOURS

The iKONIC CLassic shaft and doors are supplied as standard in RAL 9016 with optional RAL Colours of your choice available.

Here is a list of colours commonly used:

FLOOR SAMPLES

The black Altro Contrax safety floor is delivered as standard. In addition, we offer you the choice between several other safety floors, or resistant and durable aluminium chequer plate.

















Use your own flooring

If you would like to use your own flooring we can prep our platform to suit a tile of up to 20mm. This means you can match your platform to your existing flooring, or your bespoke flooring choice.

Most Popular



















RAL 9005 | JET BLACK

www.ikoniclifts.co.uk 07



Head Office: +44 (0)203 376 6440

sales@ikoniclifts.co.uk

www.ikoniclifts.co.uk

