ACCESSIBILITY SOLUTION FOR ART DECO GRADE II LISTED BUILDING

Hiro 350 Incline Platform Lift

iKONIC LIFTS

Sophisticated Lift Thinking

HIRO 350 STRAIGHT INCLINE

Industry
Lesuire

Building Type
Historical

Total Project Time
6 Weeks

Our People
Consultant
Project Manager
2 x Engineers

Installation Time
1 Day

Location
Tenbury Wells

OUR CLIENT

iKONICs team were excited to receive an enquiry from The Regal Theatre in Tenbury Wells.

An amazing art deco Grade II listed building which first opened its curtains in 1937 and was used as a cinema until 1966.

Later the Parish Council purchased the cinema in 1970 on behalf of the community and carried out works to turn the building into a theatre and reopened two years later and has remained a theatre to this day serving the community.

The lower levels of the art deco auditorium recently suffered flooding and significant damage along with dealing with the coronavirus outbreak.

The theatre contracted us via our website regarding an accessibility solution and requested we carry out a survey.

iKONIC
CHALLENGE

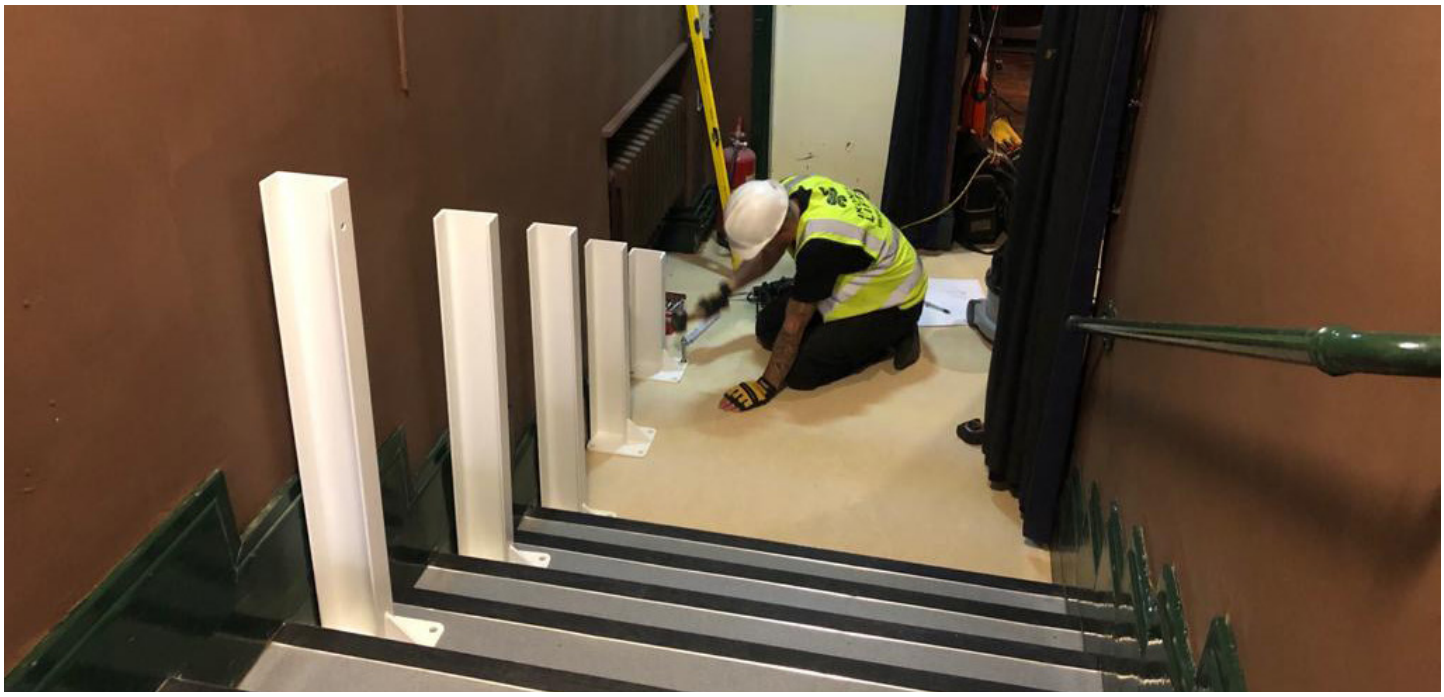

Our consultant attended site to carry out a survey to see if it was feasible to install a wheelchair lift on a small staircase to provide disabled access to the theatre.

Due to a recent flood the theatre has being refurbished to repair the damage caused by the flood.

On first look Paul instantly identified a challenge to overcome with regards to the installation of the track due to the historic walls being rather uneven and not level.

iKONIC
SOLUTION

iKONIC wanted to provide a robust solution that would serve the long-standing building for many years to come.

The ideal solution for the regal was our iKONIC German engineered Hiro 350 Straight Inclined Platform Lift.

Due to the angles of the art deco building and, the walls on the bottom of the landing area. This inclined lift allowed for access on three sides giving easier access for wheelchair users.

With our team's knowledge we were also able to increase and upgrade the carrying capacity to 300kg which gives more scope for users.

To overcome the heritage buildings uneven walls, we opted to post mount the incline track to provide the best result and smooth safe running of the platform lift.

iKONIC
RESULT

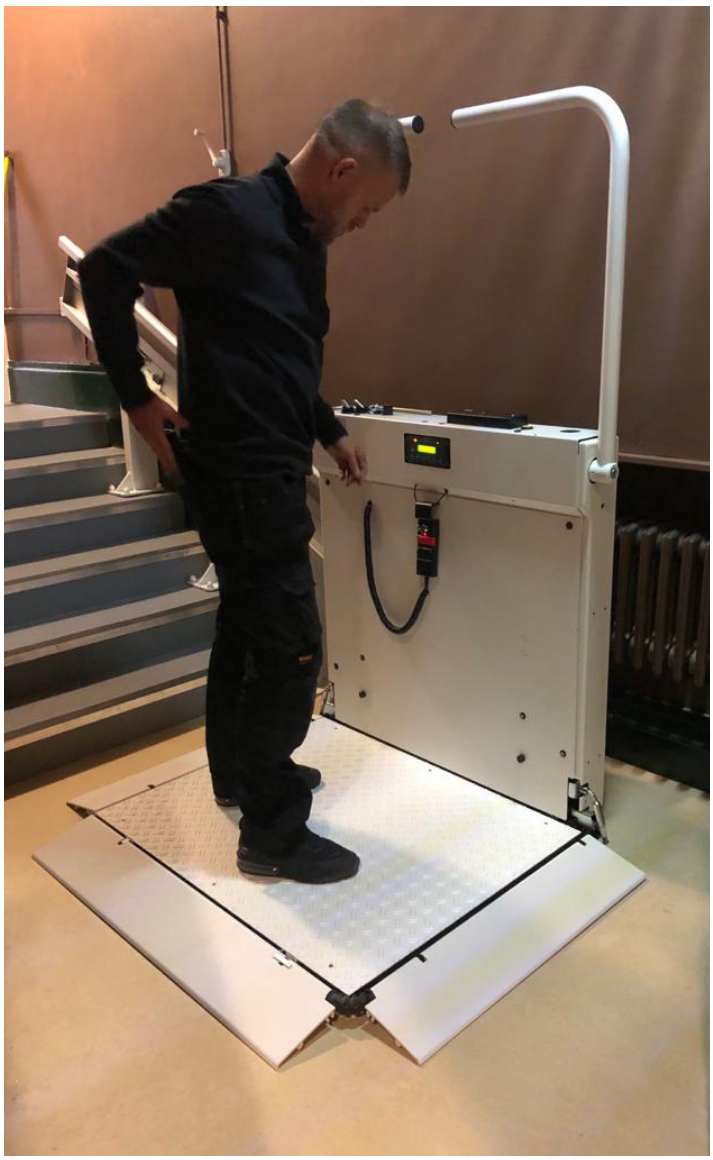

With the lift installation completed and final testing and safety checks, iKONIC handed over the new step lift to the client on time for the building's completion.

The lift has now given easy access to the main theatre for all to enjoy for many years to come.

iKONIC are now looking forward to the next project with the client.

iKONICs Hiro 350 Straight Inclined Platform Lift, complies with: Machinery Directive 2006/42/EC and, BS EN 81-40